




**CABLE DE ACERO (6X19) ALMA DE ACERO/ALMA DE FIBRA – CABLE DE ACERO (6X25)**

SERIE  
6X19

SERIE  
6X25

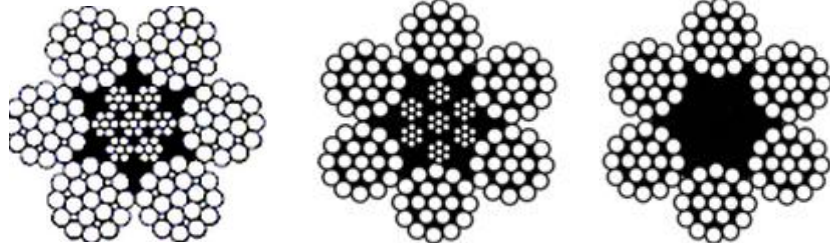

Diámetro		Alma de Acero (IWRC)		Alma de Fibra (FC)	
m.m.	Plg.	Peso Kg/mts	Resistencia Ruptura en toneladas IPS	Peso Kg/mts	Resistencia Rupturas en toneladas IPS
3.2	1/8	0.04	0.69	0.04	0.63
4.8	3/16	0.10	1.43	0.08	1.40
6.4	1/4	0.17	2.67	0.16	2.48
8.0	5/16	0.27	4.16	0.24	3.86
9.5	3/8	0.39	5.95	0.35	5.53
11.5	7/16	0.52	8.07	0.48	7.50
13.0	1/2	0.68	10.40	0.63	9.71
14.5	9/16	0.88	13.20	0.79	12.20
16.0	5/8	1.07	16.20	0.98	15.10
19.0	3/4	1.55	23.20	1.41	21.60
22.0	7/8	2.11	31.40	1.92	29.20
26.0	1	2.75	40.70	2.50	37.90
29.0	1 1/8	3.48	51.30	3.17	47.70
32.0	1 1/4	4.30	63.00	3.91	58.60
35.0	1 3/8	5.21	75.70	4.73	70.50
38.0	1 1/2	6.19	89.70	5.63	83.50
42.0	1 5/8	7.26	104.00	6.61	97.10
45.0	1 3/4	8.44	121.00	7.66	112.00
48.0	1 7/8	9.67	138.00	8.80	128.00
52.0	2	11.00	156.00	10.00	145.00
54.0	2 1/8	12.40	174.00	11.30	162.00
57.0	2 1/4	13.90	195.00	12.70	181.00
60.0	2 3/8	15.50	217.00	14.10	201.00
64.0	2 1/2	17.30	238.00	15.60	221.00